

**UNIVERSITY OF SASKATCHEWAN
ME 323.3 – MECHANICS OF MATERIALS II
MIDTERM EXAM – FEBRUARY 12, 2009**

Professor A. Dolovich

**A CLOSED BOOK EXAMINATION
TIME: 2 HOURS**

	For Marker's Use Only
LAST NAME (printed): _____	1. _____
FIRST NAME (printed): _____	2. _____
STUDENT NUMBER: _____	3. _____
EXAMINATION ROOM: _____	4. _____
SIGNATURE: _____	

Total:

INSTRUCTIONS


1. The examination consists of 4 questions.
Answer all **FOUR** questions.
The exam is out of a total of 50 marks.
The number of marks for each question is given in brackets.
PRINT YOUR NAME AT THE TOP OF EACH PAGE.

2. This is a closed book exam.
Calculators are permitted.
A list of formulas will be provided separately.

3. **SHOW YOUR WORK NEATLY AND CLEARLY.**
Give final answers to 3 significant figures.
Neatly place a box around each final answer.

4. Your solutions are to be given in the space below the question.
Continuation sheets have been provided within the exam paper.
In addition, the back of each page may be used as a continuation sheet if required.


- (15) 1. A thin walled pipe has closed ends and is subjected to an internal pressure $P = 3$ MPa, a torsional load $T = 12$ kN·m, an axial load $F = 20$ kN, and bending moment $M = 15$ kN·m, as shown. The pipe has inner diameter $d_i = 230$ mm, outer diameter $d_o = 240$ mm, and is made of a ductile material with yield point $\sigma_{yp} = 120$ MPa.

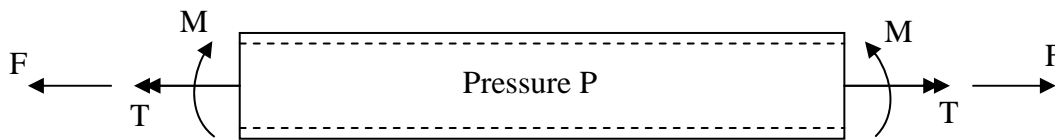

Determine the safety factor according to the von Mises criterion. Use thin wall pressure vessel theory for this problem. Assume the highest von Mises stress occurs at the outer radius of the pipe.

Continuation Sheet - Problem 1

- (15) 2. A solid, uniform circular rod of length 1.5 m is fixed at one end, and is subjected to torque $T = 2 \text{ kN}\cdot\text{m}$ and transverse load $P = 12 \text{ kN}$, as shown. The rod is also subjected to a uniformly distributed load $w = 10 \text{ kN/m}$, as shown.

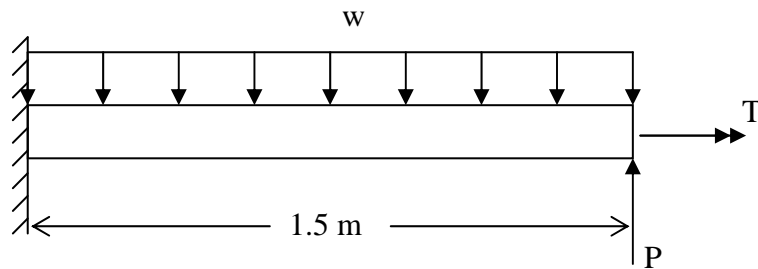

If the rod is made of a ductile material with yield stress $\sigma_{yp} = 250 \text{ MPa}$, determine the required diameter according to the Tresca theory to achieve a safety factor $SF = 2.0$. Assume that the only significant stresses are the normal stress due to the maximum bending moment and the shearing stress due to the torque.

Continuation Sheet - Problem 2

- (14) 3. A solid aluminum shaft of diameter $d = 100$ mm initially fits perfectly within a brass cylinder of nominal inner diameter $d_i = 100$ mm and outer diameter $d_o = 150$ mm. Initially, there is no significant gap between the shaft and the cylinder, and the initial interface pressure is zero. The length of contact between the shaft and cylinder is $L = 250$ mm.
- The aluminum has Young's modulus $E_a = 70$ GPa, Poisson's ratio $\nu_a = 0.36$, and thermal expansion coefficient $\alpha_a = 23.6 \times 10^{-6}/^\circ\text{C}$.
- The brass has Young's modulus $E_b = 105$ GPa, Poisson's ratio $\nu_b = 0.35$, and thermal expansion coefficient $\alpha_b = 20.9 \times 10^{-6}/^\circ\text{C}$.
- If the assembly is subjected to a temperature increase $\Delta T = 30^\circ\text{C}$ and the static coefficient of friction between the aluminum and the brass is $\mu_s = 0.4$, determine the force F necessary to cause axial motion between the mating parts at the new temperature.

Continuation Sheet - Problem 3

- (6) 4. Using words and diagrams, give the physical meaning of each term on the left hand side of the differential equation

$$\frac{d\sigma_r}{dr} + \frac{\sigma_r}{r} - \frac{\sigma_\theta}{r} = 0.$$

Continuation Sheet - Problem 4