

UNIVERSITY OF SASKATCHEWAN
DEPARTMENT OF MECHANICAL ENGINEERING
ME 450.3 FINITE ELEMENT ANALYSIS
FINAL EXAMINATION

Time: 3 hours
Closed-book examination
3 double-sided sheets of formulas are allowed
Answer **three** questions only

December 2004
W. Szyszkowski

-
- Q1.** Apply *one* element of length L to evaluate the deformations, stresses, vibrations and stability of the beam shown in Figure 1.
- Determine the slope at node 1 and the reactions due to gravity load p .
Calculate the location of maximum absolute deflection, and sketch the deformed configuration of the beam. Also, for comparison, sketch the displacement plot that would be obtained from ANSYS if one **beam3** element was used.
 - Use the reaction results to determine the nodal M and V .
Plot the M and V diagrams using the ANSYS sign convention (as if obtained from ANSYS, and one **beam3** element).
Calculate the maximum bending stress, and the maximum average shear stress in the beam.
 - Use the geometrical stiffness matrix to solve the buckling problem if a horizontal force $H=10,000N$ is applied. Determine the safety factor for stability.
Sketch the corresponding buckling mode.
 - Use proper mass matrices to determine the frequency of flexural free vibrations, and then the frequency of axial free vibrations.
Sketch the corresponding modes of vibration.
 - How would your results in **a-d** be affected if the beam was meshed with say 20 elements?
Given: $E=200GPa$, $\rho = 7800 \text{ kg/m}^3$, $I = \frac{\pi}{64} D^4$

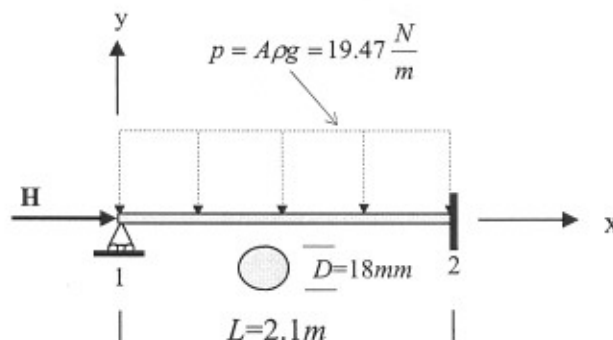


Figure 1

Q2. (a) The structure shown in Figure 2' was analyzed in *labs #1, #4* to evaluate:

- The maximum vertical displacement.
- The maximum stress.
- The safety factor for stability.

It was modeled by either **link1**, or **beam4** ANSYS elements. However, the structure may also be modeled by using elements **link8**, or **beam3**.

Explain in detail pros & cons of applying the above elements.

In particular, describe how the results related to the structure's displacements, stresses, and stability will be affected, if the following element type is used:

- 1) **link1** - the 2-D bar element,
- 2) **link8** - the 3-D bar element,
- 3) **beam3** - the 2-D beam element,
- 4) **beam4** - the 3-D beam element.

Be as specific as you can when describing similarities or/and differences in the results obtained from the above elements.

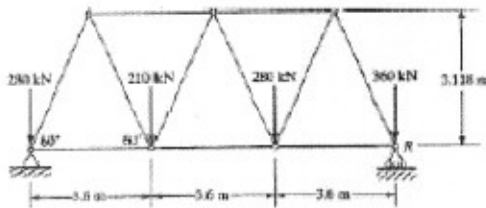


Figure 2'

(b) In the problem analyzed in *lab #4* (see Figure 2'') elements **beam4** and **shell63** were used to model the legs and the top plate respectively.

- 1) Can **beam4** be replaced by **link8**, and **shell63** be replaced by **plane42** in this analysis?
- 2) Can the legs be modeled by **shell63** elements?
Justify your answers to questions (1) and (2).
- 3) The structure has two planes of symmetry. How the calculated maximum displacements, maximum stresses, and the frequencies of free vibrations will be affected if only a quarter of the structure is modeled.

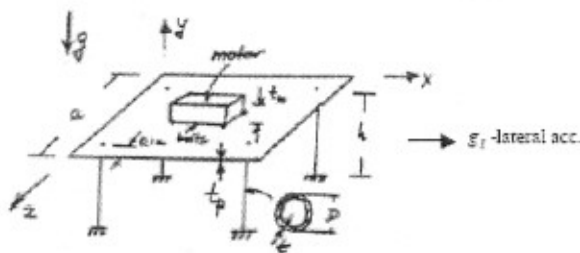


Figure 2''

Q3. (a) The fictitious moment at node 1 of the beam element is defined as

$$M_1^p = \int_{-1}^1 p(\xi) \cdot N_2 \cdot \det J \cdot d\xi, \text{ where the shape function } N_2 = \frac{1}{2}LH_2,$$

$$\text{and where } H_2 = \frac{1}{4}(1-\xi)^2(\xi+1).$$

Determine M_1^p for the distributed load p given as $p(\xi) = p_1 \frac{1-\xi}{2} + p_2 \frac{1+\xi}{2}$

(see Figure 3') by using: 1) two Gauss integration points,
2) three Gauss integration points.

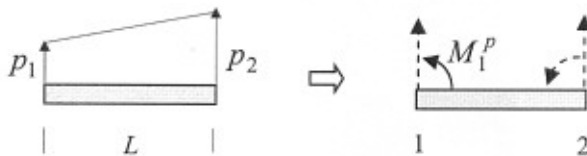


Figure 3'

Compare with the exact value $M_1^p = \frac{L^2}{60}(3p_1 + 2p_2)$ obtained from the direct integration.

(b) For the quadrilateral element shown determine:

1) The terms $\frac{\partial x}{\partial \xi}$, $\frac{\partial x}{\partial \eta}$, $\frac{\partial y}{\partial \xi}$, and $\frac{\partial y}{\partial \eta}$ of the Jacobian J .

$$\text{Show that } \det J = \frac{a}{4} - \frac{1-a}{8}(\xi + \eta).$$

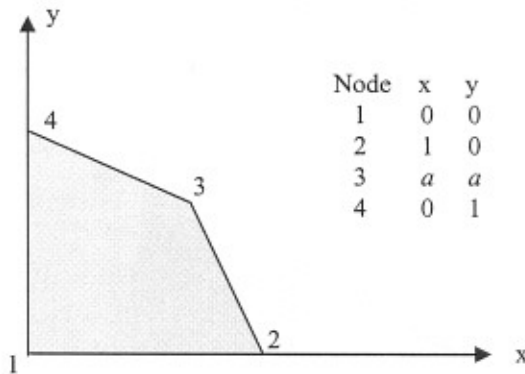


Figure 3''


2) For $a=0.6$ find the value of $\frac{(\det J)_{\max}}{(\det J)_{\min}}$, and comment on the meaning of this ratio.

Determine the x, y coordinates of G_2 (the Gauss point corresponding to $\xi = 1/\sqrt{3}$ and $\eta = -1/\sqrt{3}$).

3) Explain in detail why the element becomes unacceptable if $a \leq 0.5$ (use the cases $a=0.5$ and $a=0.25$ as illustrations, for example).

What would be minimum value of a to be acceptable by ANSYS without warning?

- Q4.** Explain how you would set up the ANSYS model for the cylindrical pressure vessel of diameter D and flat closures as shown in Figure 4. The stresses in the vessel that contains a fluid of temperature T (assume this temperature for the inside surfaces) and under uniform overpressure p are to be analyzed. Also, you must make use of the plane of symmetry.

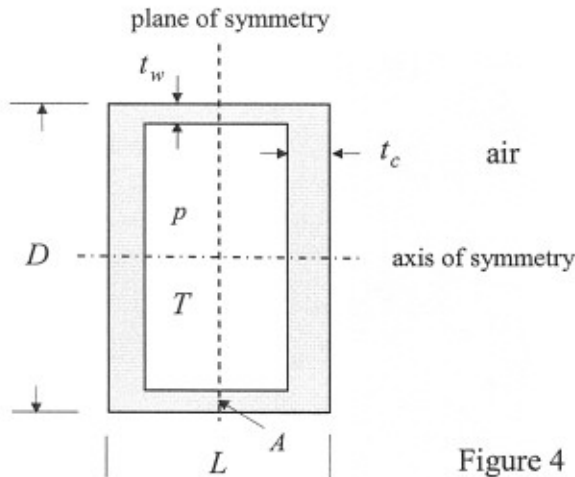

Assume that E (Young modulus), ν (Poisson's ratio), k (conductivity), h (convection to air) are given.

Also, assume: $T_{air} = 20^{\circ}C$
 $p = 20MPa$, $T = 200^{\circ}C$
 $D = 200mm$, $L = 100mm$
 $t_c = 30mm$, $t_w = 10mm$

Figure 4

- List the types of elements you would use.
- Select the keypoints and identify their location. List your selection.

K_i	x_i	y_i
1

- Define and sketch the areas to be meshed.
- Describe in detail the boundary conditions for the thermal problem.
- Describe in detail the boundary conditions and the loading for the stress problem.
- At point A the postprocessor renders the stresses: $s_x=10$, $s_y=100$, $s_z=200$, $s_{xy}=0$. Explain the meaning and sketch the directions of these stress components.
- What will be the value (and the meaning) of the stress denoted as $seqv$ at point A ?

* For (d) and (e) you may list the lines (or nodes) to which particular BC/loads are applied, no strict ANSYS commands are required.

THE END
 Merry Christmas and Happy New Year!!!